


**BEST ON REBAR** LESS THAN 5/8" IN DIAMETER.



## ROTARY HAMMER REBAR PUNCHER

PART#	DESCRIPTION	QTY.	LIST
RG-8	<b>1/2" x 7-1/2"</b> (9" OAL) REBAR PUNCHER	1 EA.	\$101.35
RG-9	<b>9/16" x 7-1/2"</b> (9" OAL) REBAR PUNCHER	1 EA.	\$101.35
RG-10	<b>5/8" x 7-1/2"</b> (9" OAL) REBAR PUNCHER	1 EA.	\$101.35
RG-11	<b>11/16" x 7-1/2"</b> (9" OAL) REBAR PUNCHER	1 EA.	\$102.94
RG-12	<b>3/4" x 7-1/2"</b> (9" OAL) REBAR PUNCHER	1 EA.	\$117.38
RG-14	<b>7/8" x 7-1/2"</b> (9" OAL) REBAR PUNCHER	1 EA.	\$152.22
RG-16	<b>1" x 7-1/2"</b> (9" OAL) REBAR PUNCHER	1 EA.	\$164.76
RG-18	<b>1-1/8" x 7-1/2"</b> (9" OAL) REBAR PUNCHER	1 EA.	\$179.30
RG-20	<b>1-1/4" x 7-1/2"</b> (9" OAL) REBAR PUNCHER	1 EA.	\$200.21
RG-PLUS	SDS-PLUS ATTACHMENT (Fits All Sizes)***	1 EA.	\$39.42
RG-MAX	SDS-MAX ATTACHMENT (Fits All Sizes)***	1 EA.	\$78.14

\*\*Pair your Rebar Puncher with the SDS-Plus or SDS-Max Attachment.

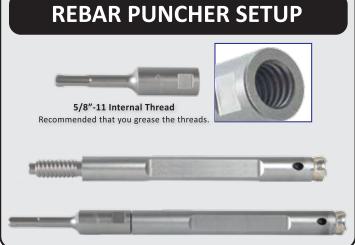

## **3 SIMPLE STEPS TO DRILLING REBAR**

- 1. When rebar is encountered while drilling, immediately stop the rotary hammer drill and remove the bit from the hole. (failure to do this will severely damage a carbide hammer bit.)
- 2. With a rotary hammer rebar puncher mounted in a SDS-PLUS or SDS-MAX drill with the selector in the rotary hammer position, insert the rotary hammer rebar puncher into the hole and drill through the embedded rebar.
- 3. Remove the rotary hammer rebar puncher after the rebar has been drilled completely through and finish drilling the hole with the carbide hammer bit.

