



This High Tension Hack Saw Frame features a **NEW Cushin' Grip** handle and end pieces made of die cast aluminum. It is light weight yet extremely rigid and high tensioned; which provides cleaner, surer cuts. The blade can be set at a 55° angle for special flush cutting jobs (see figure **A**). The blade can also be inserted into the front end of the hack saw frame, and used as a versatile compass saw (see figure **B**). This frame fits most standard tool boxes.

- ◆ RED Cast Aluminum
- ◆ Light Weight
- ◆ Extremely Rigid
- ◆ Versatile
- ◆ 25,000 lbs Per Square Inch
- ◆ Includes 1 12" x 24T Bi-Metal Blade


High Tension Hack Saw Frame

Part #	Description	List
278HX0002	High Tension Hack Saw Frame	\$29.96



Hack Saw Blades - Bi-Metal

Part #	OAL	Teeth Per Inch	Wide	Thick	QTY.	List/ea.
278BM0018	12"	18T	1/2"	.025"	10	\$2.53
278BM0024	12"	24T	1/2"	.025"	10	\$2.53
278BM0032	12"	32T	1/2"	.025"	10	\$2.53

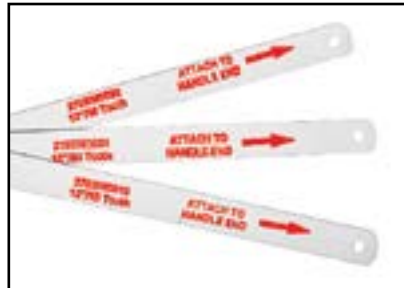

- ◆ Bi-Metal
- ◆ 8% Cobalt
- ◆ Premium Quality
- ◆ White Finish

Band Saw Blades - Bi-Metal

Part #	OAL	Teeth Per Inch	Wide	Thick	QTY.	List/ea.
B320018 *	32-7/8"	18T	1/2"	.020"	3	\$10.97
B321418 *	32-7/8"	14/18T	1/2"	.020"	3	\$10.97
B350018 **	35-3/8"	18T	1/2"	.020"	3	\$10.97
B351418 **	35-3/8"	14/18T	1/2"	.020"	3	\$10.97
279SB0010	44-7/8"	10T	1/2"	.020"	3	\$12.08
279SB0014	44-7/8"	14T	1/2"	.020"	3	\$12.08
279SB0018	44-7/8"	18T	1/2"	.020"	3	\$12.08
279SB0024	44-7/8"	24T	1/2"	.020"	3	\$12.08
279VP1014	44-7/8"	10/14	1/2"	.020"	3	\$12.08
279VP1418	44-7/8"	14/18	1/2"	.020"	3	\$12.08



* DEWALT® - DCS370L, B, K
 ** MILWAUKEE® - M18 (2629-20), 6242-6, 2629-22

Made In



- ◆ Made In USA
- ◆ Bi-Metal
- ◆ 8% Cobalt
- ◆ Premium Quality
- ◆ Standard or Variable Pitch
- ◆ Use In All Hand Held Band Saws

